


# Manual Call Point FD7150

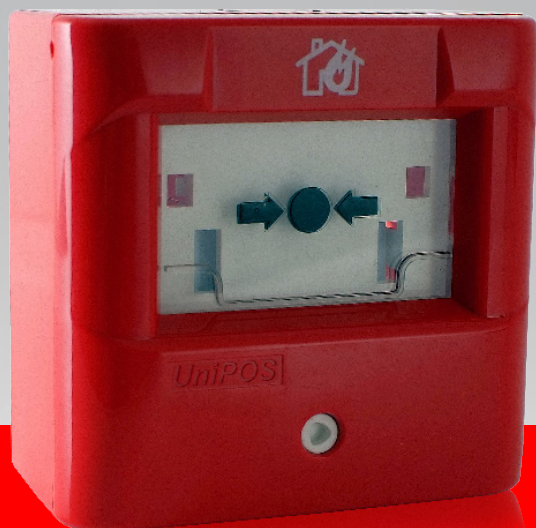

The manual call point FD7150 is designed for indoor installation as a component of an Addressable Fire Alarm System IFS7000 series. The unit is compatible with the requirements of the European Standard EN54-11:2001/A1:2005, EN54-17:2005/AC:2007.

The FD7150 manual call point has a built-in short circuit isolator for the signal loop. The communication between the addressable manual call point and the Panel is based on a private UniTalk protocol.

## Technical data

**Supply voltage:**

– (10-30) VDC

**Degree of protection:**

– IP 40

**Current in quiescent state:**

– < 390  $\mu$ A

**Current in alarm state:**

– (3 $\pm$ 1) mA

**Electrical installation:**

Through terminal for connecting wires with cross-section (0,5-1,5) mm<sup>2</sup>

Operational temperature range: -10°C to +55°C

Relative humidity resistance: (93 $\pm$ 3)% at 40°C

Dimensions: 98 x 96 x 51 mm

Weight of the manual call point: 0.150 kg

**The LED indicator provides the following status information:****– Duty mode:**

the LED flashes shortly on 16s period

**– Alarm condition:**

the LED flashes with continuous light

**– Activated short circuit isolator:**

the LED flashes shortly on 1s period



Office building UniPOS,  
1 Efr. Nikola Paskalev Str., Mladost 1, Sofia 1748, Bulgaria  
Phone: +359 2 97 439 25, +359 2 97 444 69

47 San Stefano Str., Pleven 5800, Bulgaria  
Phone: +359 64 891 100

**[www.unipos-bg.com](http://www.unipos-bg.com)**